


SEAM SEALING TAPE

TECHNICAL DATA SHEET

PRODUCT DESCRIPTION

Seam Sealing Tape is a reinforced, 1mm thick acrylic tape with high tack and shear strength performance acrylic adhesive. Excellent resistance to moisture, chemical, UV and heat; making the tape bond securely to a wide range of surfaces. Ideal for replacing seams on automotive doors and flanges, etc.

PRODUCT CONSTRUCTION

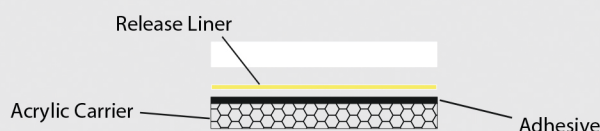

SHELF LIFE

Two years from date of receipt by customer when stored at 30°C ±8°C (85°F ±15°F) and 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and not to be used for specification purposes.

Carrier	Clear Acrylic Foam
Adhesive	Acrylic adhesive integral to foam
Colour	Clear (with White HDPE Release-Liner)
Thickness	1.00mm (±0.10mm)
Width	9mm or 12mm (±5%). Other widths available on request.
Length	10m (±0.2m) as standard. Other lengths available on request.

PERFORMANCE PROPERTIES

Values shown are typical values and not to be used for specification purposes.

Peel Adhesion	19N/cm (±3) (180° S/Steel)
Elongation at Break	>200%
Temperature Resistance	Long Term 90°C/195°F (up to 7 days) / Short term 120°C/250°F (up to 4 hours)

BULLDOG ABRASIVES

No. 4 Andries Street South, Wynberg, Johannesburg, 2090

Tel: +27 (0) 11 786 5991

Email: sales@bulldogabrasives.co.za

Website: www.bulldogabrasives.co.za